
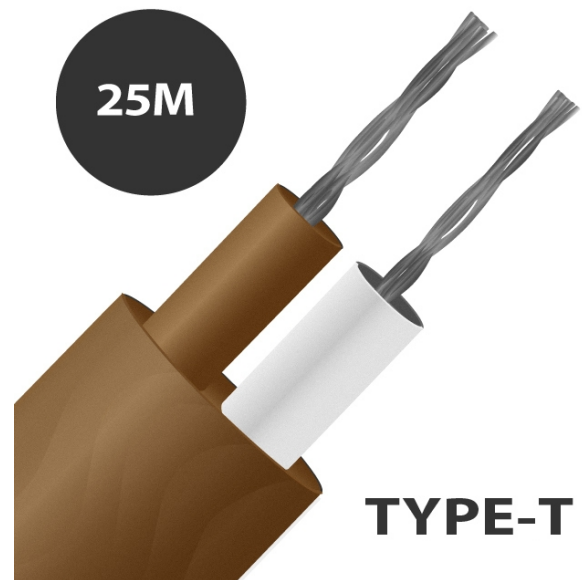
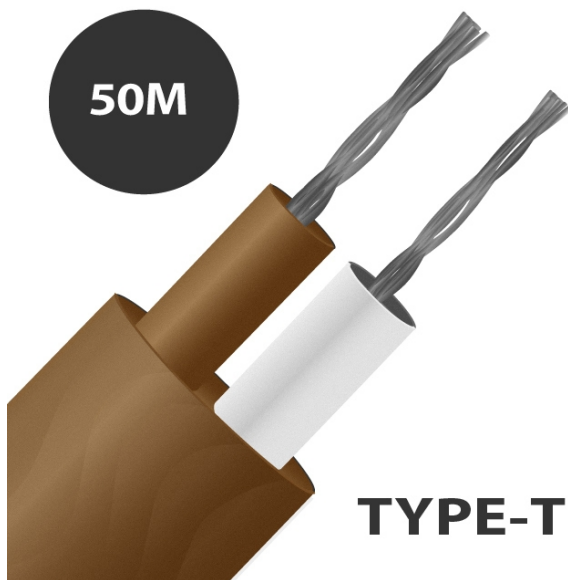


## Cable / alambre de termopar plano de par plano con aislamiento de PVC tipo T (IEC)

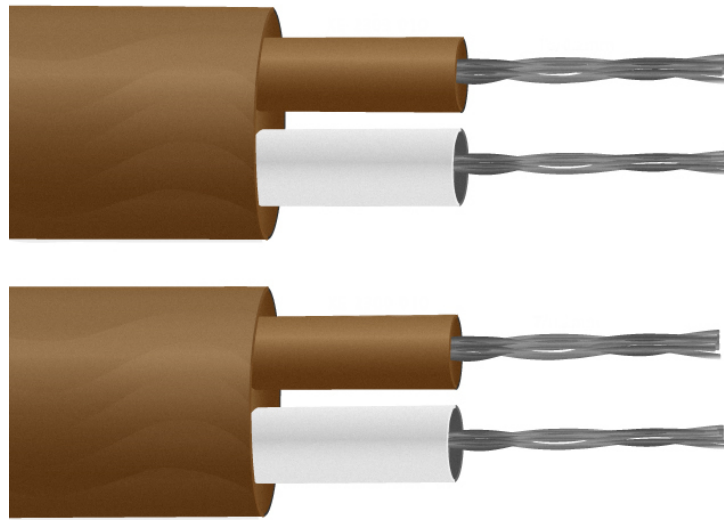

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

**Caractersticas tcnicas**
**Specifications**

<b>General Description</b>	Good general purpose insulation for 'light' environments. Waterproof and very flexible.
<b>Cable Length</b>	10, 25, 50, 100 & 200m
<b>Cable Type</b>	Flat pair construction
<b>Core / Strands</b>	7/0.2mm or 13/0.2mm
<b>Conductor Cross Section 1/0.315 (mm<sup>2</sup>)</b>	0.078
<b>Conductor Cross Section 1/0.508 (mm<sup>2</sup>)</b>	0.203
<b>Conductor Cross Section 7/0.2 (mm<sup>2</sup>)</b>	0.219
<b>Conductor Cross Section 13/0.2 (mm<sup>2</sup>)</b>	0.408
<b>Outer Colour</b>	Brown
<b>+ Colour</b>	Brown
<b>- Colour</b>	White
<b>Drain Wire</b>	No
<b>Insulation Material</b>	PVC Insulated
<b>Loop Resistance 1/0.315 (Ohms per combined metre)</b>	6.5

Loop Resistance 1/0.508 (Ohms per combined metre)	2.5
Loop Resistance 7/0.2 (Ohms per combined metre)	2.3
Loop Resistance 13/0.2 (Ohms per combined metre)	1.2
Max. Temperature	+105°C
Min. Temperature	-10°C
+ Conductor	Copper
- Conductor	Constantan
Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	T
Tolerance	Class 2