
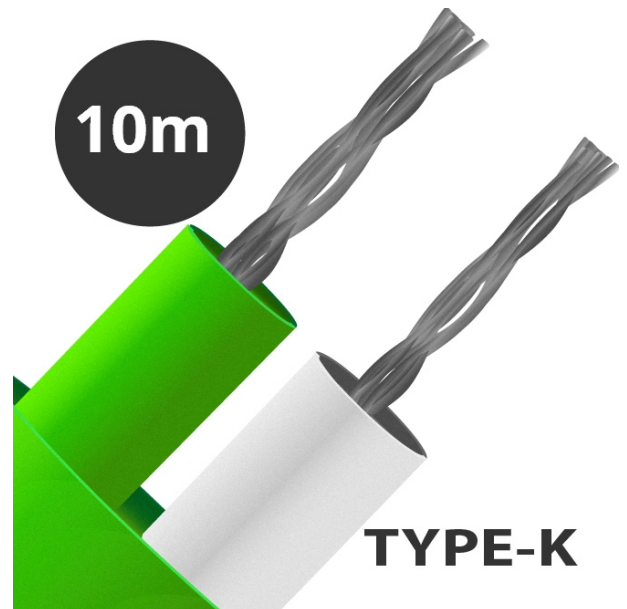
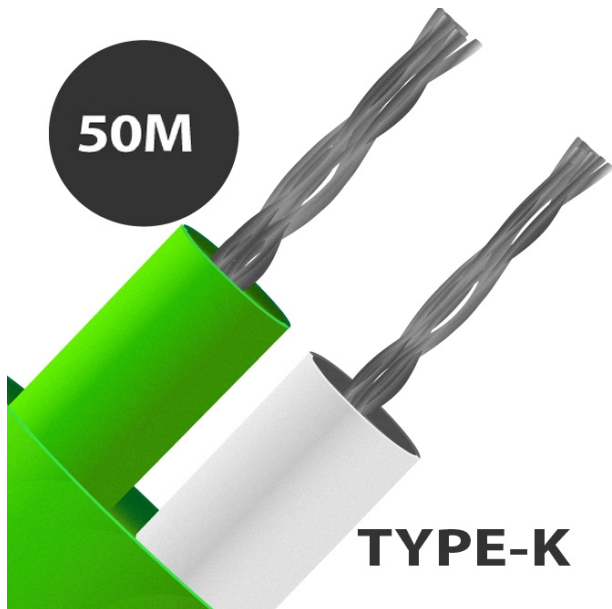


## Cable / alambre termopar de par plano aislado con PTFE tipo K (IEC)

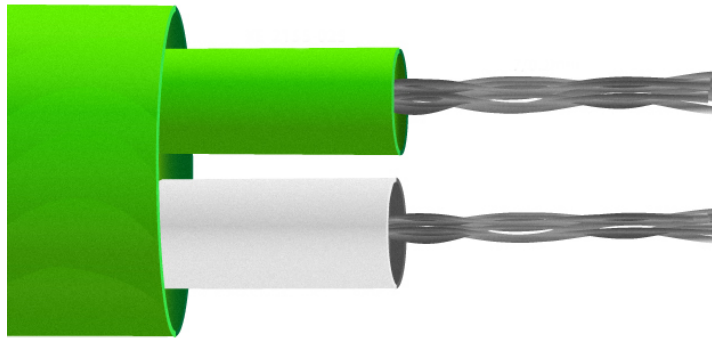

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

**Cable / alambre termopar de par plano aislado con PTFE tipo K (IEC)**

Par plano aislado con PTFE. El PTFE tiene una buena resistencia mecánica y flexibilidad, resistente a aceites, ácidos y otros fluidos adversos.

**Características técnicas**
**Specifications**

<b>General Description</b>	Resistant to oils, acids adverse agents and fluids. Good mechanical strength and flexibility.
<b>Cable Length</b>	10m, 25m, 50m, 100m
<b>Cable Type</b>	Flat pair cable
<b>Core / Strands</b>	7/0.2mm , 1/0.315mm
<b>Conductor Cross Section 1/0.315 (mm<sup>2</sup>)</b>	0.078
<b>Conductor Cross Section 7/0.2 (mm<sup>2</sup>)</b>	0.219
<b>Outer Colour</b>	Green
<b>+ Colour</b>	Green
<b>- Colour</b>	White
<b>Drain Wire</b>	No
<b>Insulation Material</b>	PTFE insulated
<b>Loop Resistance 1/0.315 (Ohms per combined metre)</b>	12.8



<b>Loop Resistance 7/0.2 (Ohms per combined metre)</b>	4.5
<b>Max. Temperature</b>	+260°C
<b>Min. Temperature</b>	-75°C
<b>+ Conductor</b>	Nickel Chromium
<b>- Conductor</b>	Nickel Aluminium
<b>Screen</b>	No
<b>Standards Met</b>	Colour code (cores & jacket) to IEC-584-3
<b>Thermocouple Type</b>	K
<b>Tolerance</b>	Class 1