



## Tipo K PFA aislado doble par trenzado termopar cable / alambre (ANSI)

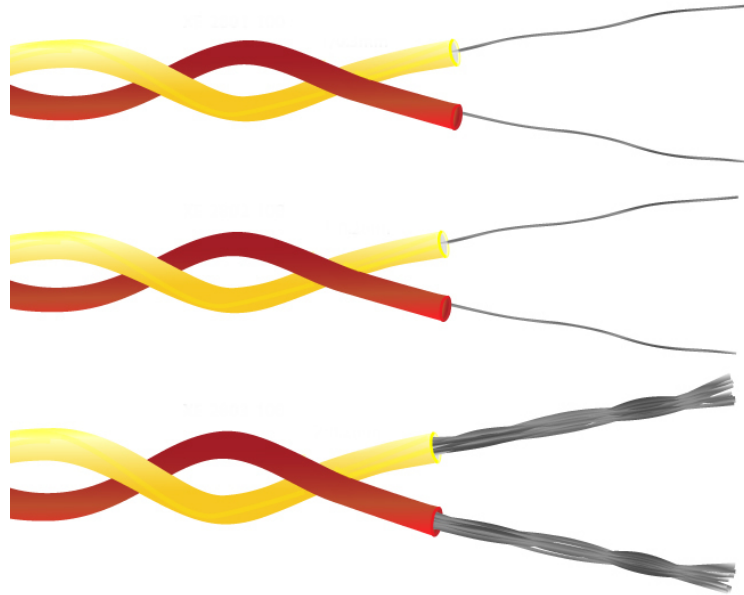


**10m**

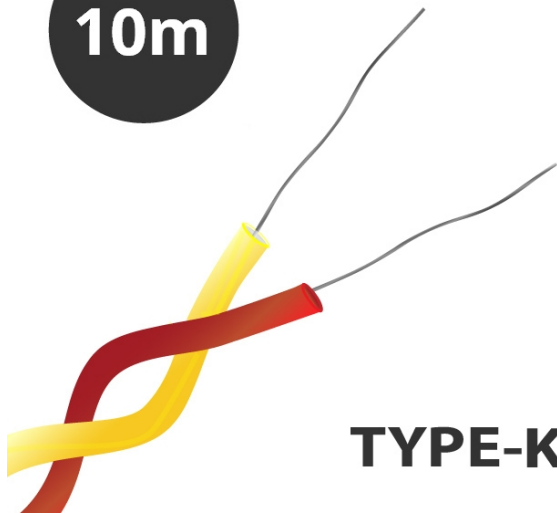

**TYPE-K**

**25M**

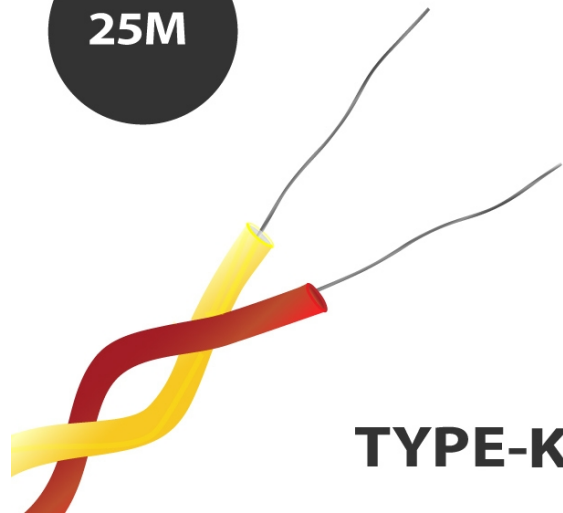

**TYPE-K**

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

**Tipo K PFA aislado doble par trenzado termopar cable / alambre (ANSI)**

PFA Teflon par trenzado doble para extender o hacer termopares simples. PFA Teflon tiene una buena resistencia mecánica y flexibilidad, resistente a aceites, ácidos y otros fluidos adversos, gases, vapor y presión.

**Características técnicas****Specifications**

<b>Cable Length</b>	10m, 25m, 50m, 100m
<b>Cable Type</b>	Single pair of PFA insulated conductors twisted together
<b>Core / Strands</b>	1/0.2mm, 1/0.3mm or 7/0.2mm
<b>Conductor Cross Section 1/0.2 (mm<sup>2</sup>)</b>	0.032
<b>Conductor Cross Section 1/0.315 (mm<sup>2</sup>)</b>	0.078
<b>Conductor Cross Section 7/0.2 (mm<sup>2</sup>)</b>	0.219
<b>+ Colour</b>	Yellow
<b>- Colour</b>	Red
<b>Drain Wire</b>	No
<b>Insulation Material</b>	PFA Teflon®
<b>Loop Resistance 1/0.2 (Ohms per combined metre)</b>	31.8
<b>Loop Resistance 1/0.315 (Ohms per combined metre)</b>	12.8



Loop Resistance 7/0.2 (Ohms per combined metre)	4.5
Max. Temperature	+260°C
Min. Temperature	-75°C
+ Conductor	Nickel Chromium
- Conductor	Nickel Aluminium
Screen	No
Standards Met	Colour code (cores & jacket) to ANSI MC96.1
Thermocouple Type	K
Tolerance	Class 1