




LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

Termopar con aislamiento mineral con sello de olla lisa y 1 m de cable IEC con aislamiento de PFA - Tipos K, J, T, N

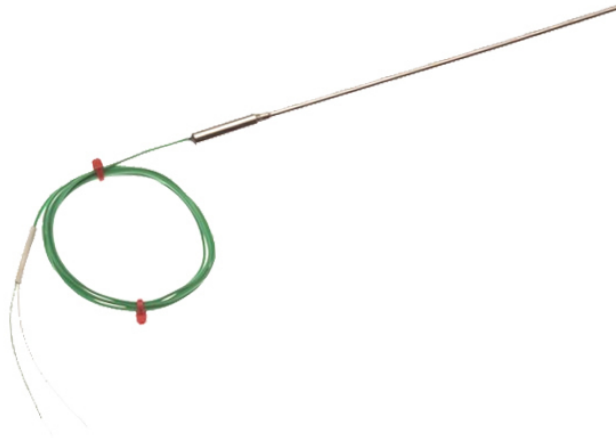

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Junta de olla lisa (200 C) con 1 metro de plomo aislado con PFA, par plano de 7/0,2 mm con colas.

Necesita calibrar su sensor de temperatura?

Trazable a los estándares de calibración ISO17025 (UKAS), Labfacility ofrece la opción de una calibración trazable de 3 o 5 puntos utilizando nuestras instalaciones de calibración internas.

Tenga en cuenta que si agrega una opción de calibración a su pedido, se comunicará con usted con respecto a la información de entrega.

Características técnicas

Specifications

General Description	Plain pot seal (200°C) with 1 Metre of PFA insulated lead, 7/0.2mm flat pair with tails.
Sensor Type	Mineral Insulated
Thermocouple Type	K,J,T,N
Element/hot junction	Single element, junction insulated from sheath (offers protection against spurious electrical signals)
Probe Diameter	1.0, 1.5, 3.0, 4.5 & 6.0mm
Probe Length	150, 250, 500, 1000, 1500 & 2000mm
Sheath Material	K - Stainless steel 310, J - Stainless steel 321, T - Stainless steel 316, N - Nicrosil
Pot Type	Plain (+200°C)
Cable Length	1m
Cable Type	PFA Teflon® insulated flat pair cable and tails (colour coded to IEC 584)
Core / Strands	7/0.2mm

Termination Type	Bare tails
Max. Temperature	K +1100°C for 1.5 & 3.0mm diameters +750°C for 1.0mm diameter, J +760°C, T +400°C, N +1300°C.
Min. Temperature	K -40°C, J -100°C, T -100°C, N -100°C
Tolerance	Class 1
Standards Met	In accordance with IEC 584