



Cable / alambre de par plano aislado de fibra de vidrio tipo N con sobretrenza de acero inoxidable (IEC)

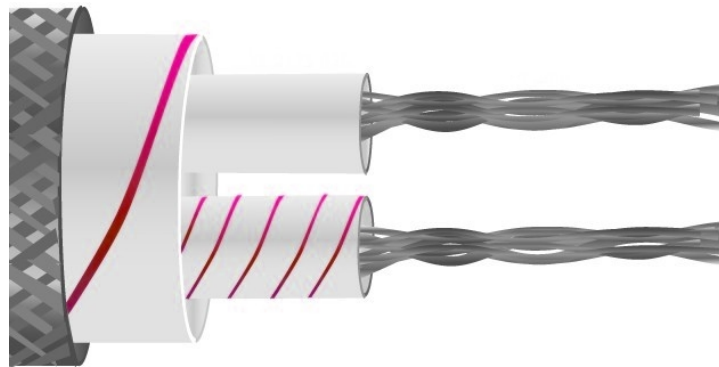


25M

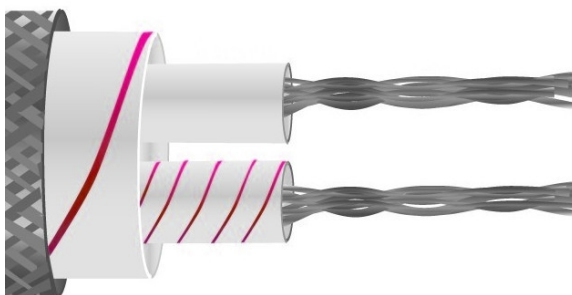

TYPE-N

10m

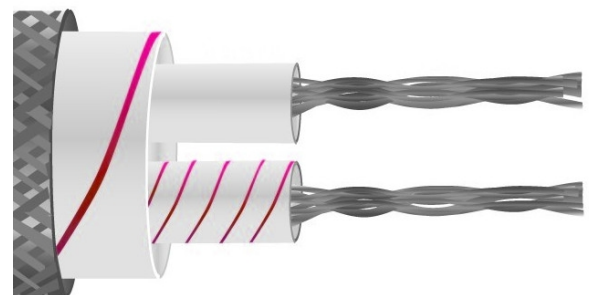

TYPE-N

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Cable / alambre de par plano aislado de fibra de vidrio tipo N con sobretrenza de acero inoxidable (IEC)

Construcción de par plano con aislamiento de fibra de vidrio, conductores colocados planos, aislamiento de fibra de vidrio con cubierta de fibra de vidrio, barnizado de silicona en toda la superficie + trenza de acero inoxidable para mayor protección y resistencia mecánica. Buena resistencia a la temperatura, pero no es adecuado donde hay fluidos presentes.

Características técnicas
Specifications

General Description	Good strength to physical disturbance and high temperature (up to 400°C). Will not prevent ingress of fluids.
Cable Length	10m, 25m, 50m, 100m
Cable Type	Flat pair cable
Core / Strands	7/0.2mm
Conductor Cross Section 7/0.2 (mm²)	0.219
+ Colour	Pink
- Colour	White
Drain Wire	No
Insulation Material	Glassfibre insulated extension cable with stainless steel overbraiding
Loop Resistance 7/0.2 (Ohms per combined metre)	6.2
Max. Temperature	+350°C (short periods up to 400°C)
Min. Temperature	-60°C
+ Conductor	Nicrosil



LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

- Conductor	Nisil
Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	N
Tolerance	Class 2