




# LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

## 0,75 mm de diametro con olla roscada y colas ANSI: aisladas o conectadas a tierra

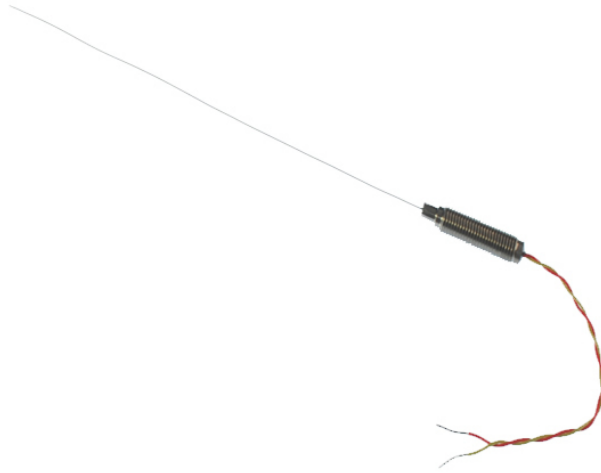

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Tipo K con olla roscada y colas de acero inoxidable 316

Si requiere cantidades mayores, enve un correo electrónico sales@labfacility.com o llame a nuestra línea de ventas 01243 871280.

### Necesita calibrar su sensor de temperatura?

Trazable a los estándares de calibración ISO17025 (UKAS), Labfacility ofrece la opción de una calibración trazable de 3 o 5 puntos utilizando nuestras instalaciones de calibración internas.

**Tenga en cuenta que si agrega una opción de calibración a su pedido, se comunicará con usted con respecto a la información de entrega.**

### Características técnicas

## Specifications

<b>General Description</b>	Type K with threaded pot & tails in either 316 stainless steel
<b>Sensor Type</b>	Mineral Insulated
<b>Thermocouple Type</b>	K
<b>Element/hot junction</b>	Single element, junction insulated or grounded from sheath
<b>Probe Diameter</b>	0.75mm
<b>Probe Length</b>	50, 100, 150, 250mm
<b>Sheath Material</b>	316 stainless steel
<b>Pot Type</b>	M8 x 1.0mm fine pitch threaded pot seal (Max Temp 200°C)
<b>Cable Length</b>	100mm
<b>Cable Type</b>	PFA insulated twin twisted IEC (Temp -75 to +250°C)
<b>Core / Strands</b>	7/0.2mm
<b>Termination Type</b>	Bare tails



# LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

<b>Max. Temperature</b>	+750°C
<b>Min. Temperature</b>	-100°C
<b>Tolerance</b>	Class 1
<b>Standards Met</b>	In accordance with ANSI MC96.1