




LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

0,81 mm de diametro con olla roscada y colas ANSI - Aislado o conectado a tierra

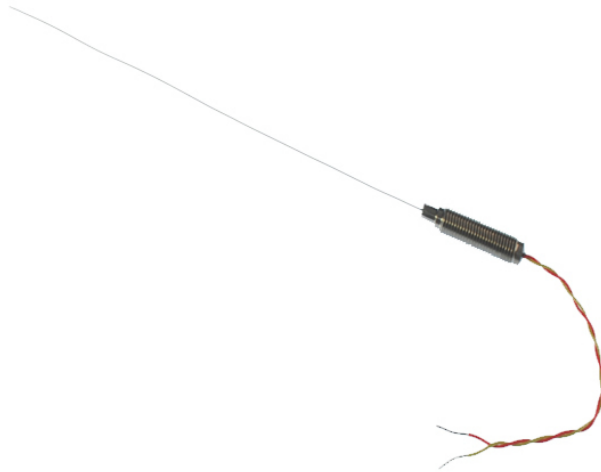

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

0,81 mm de diametro con olla roscada y colas: aisladas o conectadas a tierra

Tipo K con olla roscada y colas de acero inoxidable 316

Si requiere cantidades mayores, enve un correo electronico sales@labfacility.com o llame a nuestra linea de ventas 01243 871280.

Necesita calibrar su sensor de temperatura?

Trazable a los estndares de calibracin ISO17025 (UKAS), Labfacility ofrece la opcin de una calibracin trazable de 3 o 5 puntos utilizando nuestras instalaciones de calibracin internas.

Tenga en cuenta que si agrega una opcin de calibracin a su pedido, se comunicar con usted con respecto a la informacin de entrega.

Caractersticas tcnicas

Specifications

General Description	Type K with threaded pot & tails in 316 stainless steel
Sensor Type	Mineral Insulated
Thermocouple Type	K
Element/hot junction	Single element, junction insulated or grounded from sheath
Probe Diameter	0.81mm
Probe Length	100, 150, 250 mm
Sheath Material	Inconel Sheath
Pot Type	M8 x 1.0mm fine pitch threaded pot seal (200°C)
Cable Length	100mm
Cable Type	PFA insulated twin twisted ANSI (Temp -75 TO +250°)
Core / Strands	7/0.2mm



LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

Termination Type	Bare Tails
Max. Temperature	+650°C
Min. Temperature	-40°C
Tolerance	Class1
Standards Met	In accordance with ANSI MC96.1